



VIEWCD
Client Devices

KAMAI 6

POWERFUL 4K UHD CLIENT TV DEVICE,
INCORPORATING ADVANCED WI-FI OR
MOCA OPTIONS, TO DELIVER THE NEXT
GENERATION OF IPTV/OTT SERVICES TO
MULTIPLE TV SCREENS AROUND THE HOME



Technology advancements continue to drive consumer demand for a more interactive TV viewing experience in stunning, ultra-HD resolution. To the service provider, this means constant updates and investments in the latest technologies that power these applications all while keeping cost, quality and performance in check. With the Kamai 6 series of receivers, operators are able to provide these next generation of services in the highest possible resolution while reaping the cost benefits of reduced bandwidth and installation times.

Key Features

- Optimised for digital video broadcast and streaming media services
- Reduce bandwidth by up to 50% with H.265/HEVC support
- Superior 4K Ultra-HD resolution, 4x greater than 1080p for best viewing experience
- Dual 720p30 transcoding for multi-screen support
- Whole-home HD video distribution with flexible networking options: MoCA, Wi-Fi and BLE
- Support PLTV on Flash
- Energy efficient with DeepSleep™ technology for reducing power consumption up to 99% in standby mode



TO FIND OUT MORE PLEASE
CONTACT AN AMINO
REPRESENTATIVE BY EMAILING:

info@aminocom.com

Reduce Bandwidth, Reduce Costs

Studies have shown that H.265/HEVC provides up to 50% better compression than H.264 and 35% bandwidth reduction during live encoding. HEVC compression provides significant benefits to your network by:

- Providing an opportunity to distribute 4K Ultra-HD content without sacrificing bandwidth
- Reaching subscribers in the “last mile” that were previously difficult to reach.

This results in your ability to reduce bandwidth, increase higher quality content and reduce costs by cutting transport costs over Content Delivery Networks (CDN) and streaming content to lower bitrate connections.

Bring Your Own Device

Kamai 6 series introduces dual 720p30 transcoding to seamlessly access content to play on other video devices. This reduces costs by allowing subscribers to interact with their TV service on their personally owned devices, such as tablets or smartphones.

No New Wires

By using existing in-home wiring or wireless, Kamai 6 series provides flexible distribution technologies to meet user needs without increasing deployment costs.

Kamai 6 series supports Quantenna’s 802.11ac (5GHz) 4x4 WiFi solution for wireless HD video distribution throughout the home. Reduce installation time, cost and complexity of wiring a home with Wi-Fi. 4x4ac WiFi provides better coverage, superior performance and a high quality of service (QoS) for distributing video within the home. When matched with an accompanying access point, Kamai 6 enables whole-home Wi-Fi transmission speeds over 1.7Gbps for hassle-free installation and easy distribution of HD video throughout the home without wires. Kamai 6 series provides a true video grade Wi-Fi client solution and cost-effective architecture to accelerate the adoption of IP-based video services.

Kamai 6 also supports MoCA 2.0 to enable multi-room video distribution without new wiring at double the throughput rate of previous generations. MoCA utilises existing in-home coax to provide IP connections throughout the home. Eliminating new wiring reduces the time, complexity and cost of new subscriber installation.

Technicians are more efficient as they spend less time at each home and increase the number of new installations per day. Additionally, when subscribers move or churn, your investment remains intact in the equipment rather than in the home wiring.

The addition of Bluetooth technology improves wireless connectivity by using lowpower BLE technology to connect a variety of devices such as smartphones and tablets.

Kamai 6 series offers flexible networking technologies to ensure you have the best options to meet your customer’s distribution requirements.

Cloud-based Applications for a Connected Home Experience

Meet subscriber’s demand by offering the most advanced online services and applications. Based on Broadcom’s latest chipset, Kamai 6 series supports streaming video services like Netflix, VUDU, and YouTube.*


*Online services and applications may vary and are subject to middleware and third-party support

Ready-to-Deploy IPTV Solution

By supporting all of Amino’s ecosystem partners, including the latest digital rights management developments and conditional access solutions, Kamai 6 enables you to quickly deploy a video service that also provides advanced cloud-based features for IPTV and over-the-top (OTT) streaming applications.

Supports Legacy Televisions

Broaden your addressable homes by supporting the millions of televisions in subscriber homes that do not support HDMI. Kamai 6 supports composite video, as well as analogue stereo audio and digital multichannel audio outputs.

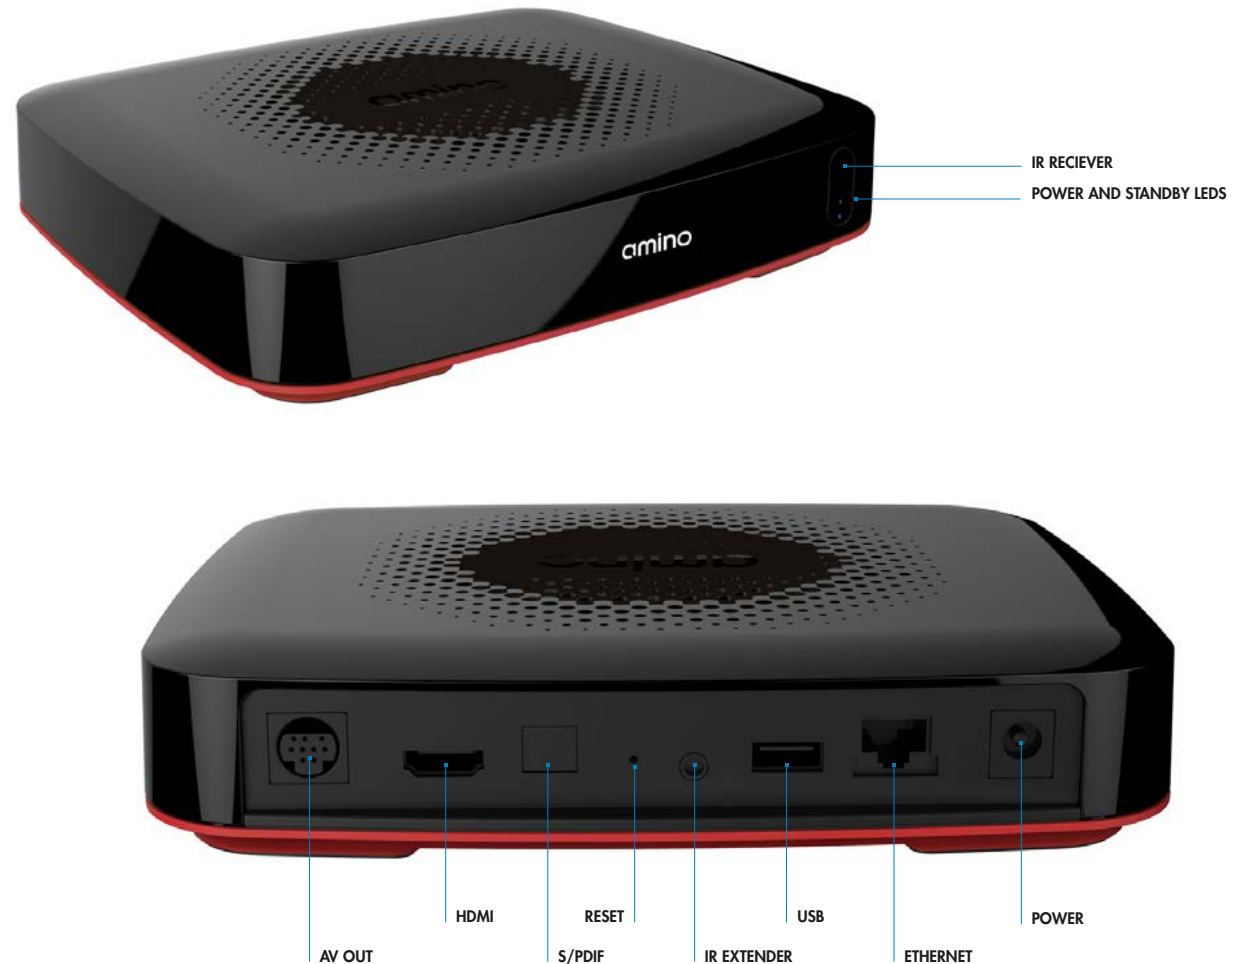

SPECIFICATIONS

VIDEO FORMATS

VC-1 Advanced Profile @ Level 3
AVC/H.264 High Profile @ Level 4.2
H.265 High Efficiency Video Coding (HEVC)
Main Profile and Main 10 Profile
MPEG-2 Main Profile @ High Level
MPEG-4 Part 2 Advanced Simple Profile
DivX versions 3.11, 4.1, 5.X, and 6.X
XVID
MPEG-1/H.261/H.263
AVS decode
with support for AVS1-P2 Jizhun Profile @ Level 6.0
MPEG still picture decode
MVC
VP9 (for YouTube)

AUDIO FORMATS

AAC LC, AAC LC+SBR Level 2, AAC HE Level 2,
AAC HE Level 4
AC4
Dolby Digital, Dolby Digital Plus
MPEG I Layer 1, 2
MPEG I Layer 3 (MP3) encode/decode
Windows® Media Audio (WMA)
WMA pro
AAC HE 5.1 decode plus DTS 5.1 encode SPDIF
output
AAC HE 5.1 decode plus AC3 5.1 encode SPDIF
output

VIDEO OUTPUTS

NTSC-M, NTSC-J, PAL-BDGHIN, PAL-M, PAL-Nc,
SECAM analog outputs
480i/480p/576i/576p/720p/1080i/1080p/4K-
2KP60 output formats
Component RGB or YPrPb output
DCS support
Rovi 7.1 support
HDMI 2.0 with 3D format support

SECURITY

AES, 1DES, 3DES, CPRM, CPPM, CSS, and DTCP
copy protection algorithms and standards
VB, ARIB, and DC2-compliant transport demux with
1DES, 3DES, DVB, Multi2, and AES descramblers

TUNERS

DVB-T2

Performance exceeding NorDig Unified 2.2 and
D-Book 7
Fully compliant with ETSI EN 300 744 (DVB-T) and
ETSI EN 302 755 (DVB-T2)
1.7, 5, 6, 7, and 8 MHz channels ITU J.83 Annex
A/B/C compatible FEC decoder with RS erasure

NETWORKING OPTIONS

Quantenna Wireless 802.11ac (5.4 GHz) 4x4 Wi-Fi
Real-time Digital Transmit Beam Forming (MIMO)
Baseband 4T4R, up to 4 spatial streams
Client-to-client direct connection (TDLS)
Digital beam forming for up to 4.5db gain
Standards: 802.11ac, 802.11a, 802.11h,
802.11n, 802.11e, 802.11i
Wi-Fi Compliant: WMM, WMM-PS, WPA, WPA2,
WPS
Encryption: AES, TKIP, WEP64/128
RF: 4.9GHz – 5.85GHz
Modulations: BPSK, QPSK, 16-QAM, 64-QAM,
256-QAM
FEC: 1/2, 2/3, 3/4, 5/6
Max PHY Rate: 1.7Gbps
MoCA 2.0
Bluetooth/BLE 4.0

ENERGY MANAGEMENT

Power 7W maximum at 90-264VAC, 48-63Hz
Compliant with European Union's Energy using
products directive for standby regulation

TYPE APPROVALS

FCC Part 15, CEA-60065

FRONT & SIDE PANELS

Illuminated standby indicator (on/standby)
IR receiver
Reset to factory

BACK PANEL

Connectors

RF Output and Antenna Input (optional)
Optical digital audio
Mini DIN connector for composite video & stereo
audio fan-out cable (included)
HDMI 2.0
USB 3.0 Host Type A
IR Extender Port
RJ-45 10/100 Base-T Ethernet with integrated status
LEDs
DC power

CPU & MEMORY

Broadcom BCM7251S
12K DMIPS, dual-core ARM-v7 CPU
1GB DDR3-1866
8GB eMMC Flash

MECHANICAL

220w x 170d x 36h mm
5-35°C (40-95°F) operating temperature
30-95% relative humidity

Ordering info

Part Number

Description

99-890000-06

Kamai 660 Media Receiver

99-880900-06

Kamai 661 Media Receiver, 802.11ac (5GHz)
4x4 Wi-Fi



Global Headquarters

Buckingway Business Park,
Anderson Road, Swavesey,
Cambridge, CB24 4UQ, UK

Tel: +44 (0) 1954 234 100

Email: info@aminocom.com

**Amino Communications Ltd is a wholly owned
subsidiary of Amino Technologies plc**

Amino and the Amino Logo are trademarks of Amino Communications Limited. All other trademarks are the property of their respective owners. © Amino Communications Ltd. 20/11/15. AM-007974-AW-17 HDMI, The HDMI Logo High Definition Multimedia Interface are trademarks or registered trademarks of HDMI licencing LLC

 **@AminoTV**

 **aminocom.com**

POWERED BY

ENABLE TV Software
Platform